




Distillation unit Type M

Treatment of contaminated solvents, concentration of rest-inks, recovery of clean solvent and reduction of waste to be disposed. Polygonal distillation boiler that features an electrically heated double jacket filled with thermal-oil. Designed for batch operation and continuous operation. Residue discharge conveniently through manhole at the front of the unit. Distillation under vacuum to lower boiling point and heating temperature. Automatic shut-off when reaching desired densification. Various options to meet respective task, Ex-proof category 1/2 according to ATEX.

distillation output*:

model M200
model M400

» 30-60 l/h
» 60-100 l/h

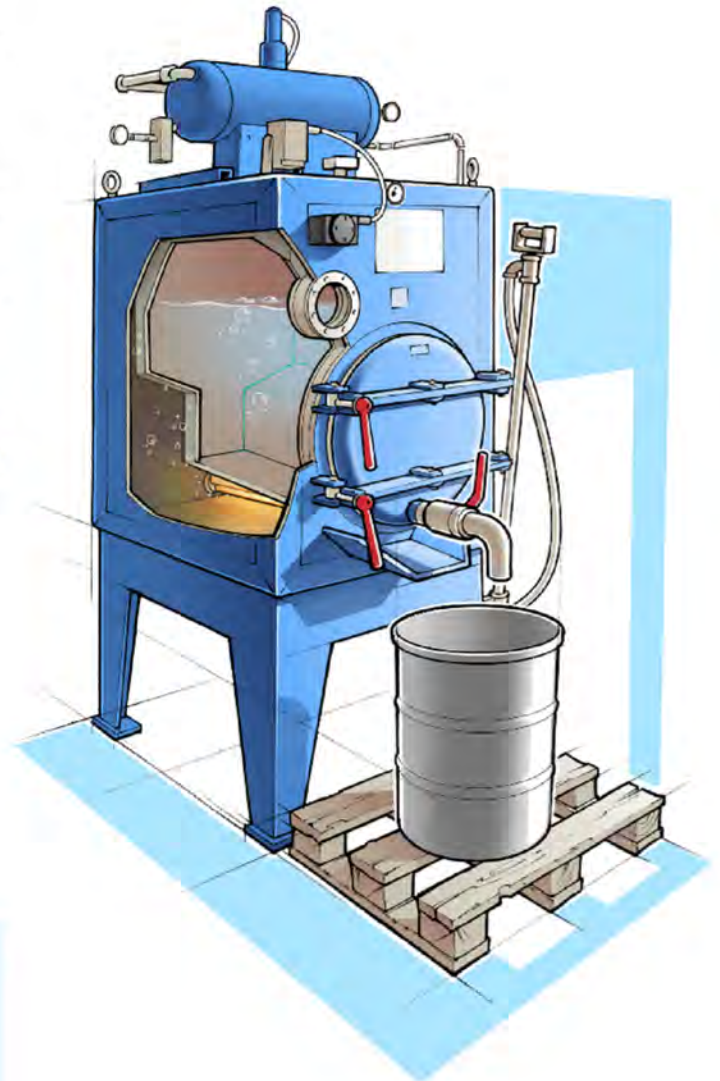

media to be distilled



* (recovery rate varies depending upon type of solvent and solvent contamination.)

REPRESENTED IN THE U.S. BY:



Daetwyler

Max Daetwyler Corporation
13420 Reese Blvd. West
Huntersville, NC 28078

Tel: 704-875-1200
Fax: 704-875-0781
E-Mail: cleaningtech@daetwyler.com